FRONT

TRIM

SLOT PUNCH

KEEP CLEAR

BACKGROUNDS MAY RUN BEHIND

BLEED 1/16 in: RUN BACKGROUNDS TO THE OUTER EDGE

SAFE LINE 1/8 in: KEEP TEXT, LOGOS AND PHOTOS INSIDE

TEMPLATE GUIDES: REMOVE BEFORE SENDING

BACK

TRIM

SLOT PUNCH

KEEP CLEAR

BACKGROUNDS MAY RUN BEHIND

BLEED 1/16 in: RUN BACKGROUNDS TO THE OUTER EDGE


SAFE LINE 1/8 in: KEEP TEXT, LOGOS AND PHOTOS INSIDE

TEMPLATE GUIDES: REMOVE BEFORE SENDING

CR80 ID card template: portrait, slot punch, no exposed chip

Print this page at 100% ("Actual size"), not "Fit to page", then check the rulers. Pages 1 and 2 are the front and back templates.


Card stock: You can order our standard white PVC cards with the slot already punched, on the short or long edge, and some of our chip cards too. Ask us about the specific card you want.

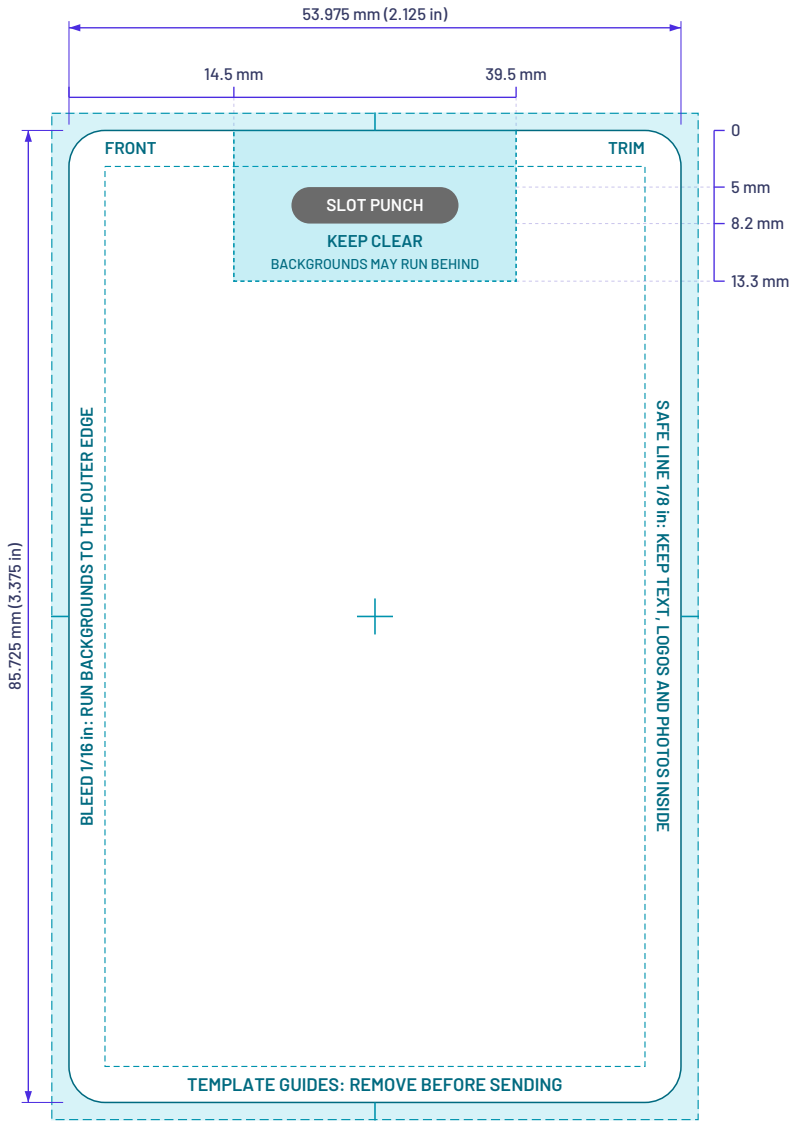


ENLARGED 1.5:1 · THE FRONT

ACROSS: MM FROM LEFT EDGE · DOWN: MM FROM TOP

ACTUAL SIZE: LAY A REAL CARD HERE

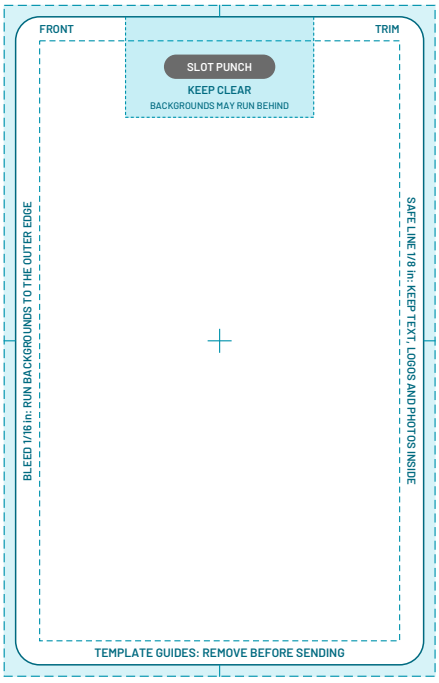

CHECK THE PRINT SCALE

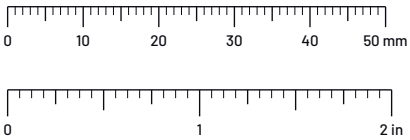

If a ruler doesn't measure exactly 50 mm or 2 in, the page was scaled: print it again at 100% (Actual size).

LATEST VERSION

Scan or visit instantcard.net/card-layout-and-artwork/ for the latest templates and numbers.

KEY NUMBERS (PX AT 300 DPI)

Card (trim)	2.125 x 3.375 in · 53.975 x 85.725 mm · 638 x 1013 px
With bleed	2.25 x 3.5 in · 57.15 x 88.9 mm · 675 x 1050 px
Bleed, each side	1/16 in · 1.5875 mm · 18.75 px
Safe margin	1/8 in · 3.175 mm · 38 px (our studio's minimum: 20 px, 1.7 mm)
Corner radius	1/8 in · 3.175 mm (ISO allows 2.88 to 3.48 mm)
Thickness	0.030 in (30 mil) · 0.76 mm (ISO allows 0.68 to 0.84 mm)
Slot hole	14.7 x 3.2 mm, pill-shaped, centered, 5 mm from the top edge
Slot keep-out	0.98 x 0.53 in · 24.9 x 13.3 mm · 294 x 157 px, from the top edge, 14.5 to 39.5 mm from the left

THE RULES

1. Run background art to the bleed edge, 1/16 in (1.6 mm) past the card edge on every side.
2. Keep text, logos, photos, barcodes and QR codes inside the safe line, 1/8 in (3.2 mm) from the edge.
3. Keep the slot punch zone clear (0.98 x 0.53 in at the top center). Backgrounds may run behind the hole.
4. Page 2 is the back: the front turned over left to right, with the slot in the same place.
5. Send RGB artwork at 300 dpi, 675 x 1050 px with bleed. Hide or delete the guide layers first.

Sources: ISO/IEC 7810:2019 (size, corners, thickness); InstantCard production data (bleed, pixel sizes, slot punch, margins).

Version 1.0.0, reviewed 2026-11-09 by InstantCard production team. CC BY 4.0 (creativecommons.org/licenses/by/4.0/): free to use and share with credit to "InstantCard, instantcard.net/card-layout-and-artwork".